


SEAWIND 1000

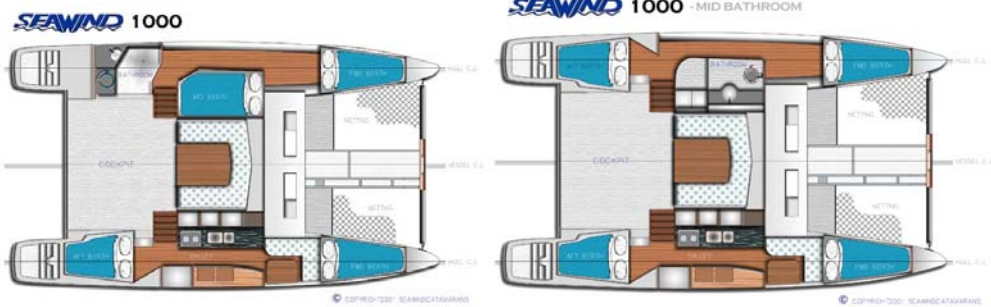

Aft Bathroom Version

Mid Bathroom Version

SPECIFICATIONS	
Overall Length	33ft / 10.0m
Beam	19'5" / 5.9 m
Draft	3' 3" / 1.0 m
Displacement	10,000lbs / 4.6 tonnes kgs
Underwing Clearance	2'6" / 0.77m
Steering Twin Helms	Cable Steering
High Thrust 4-stroke Outboards	2 x 9.9hp
Fuel	27 gallons / 120 litres
Fresh Water	89 gallons / 400 litres

**SEAWIND 1000 (10.00 METRES / 33ft)
STANDARD SPECIFICATIONS AND EQUIPMENT.**

1. **GENERAL:** The overall finish of the Seawind 1000 will be consistent with a luxury world-standard yacht of this size and type. Only very high quality equipment is used throughout
The overall aim is for a level of construction, workmanship, equipment, fitout and style comparable to the best boats available in the market at this price range.
2. **EXTERIOR/LAMINATE:**
Finish: Gelcoat finish with moulded-in non-slip surface on deck areas.
Hull Laminate: Vinyl Ester resin is used in manufacture of the hulls for the fibreglass laminate between the gelcoat and the foam core.
Laminate specifications are as approved by NSW Waterways Authority to meet Australian Survey Standards.
3. **HARDTOP:**
Fibreglass hardtop is fitted with fixed toughened glass side windows and soft PVC roll up windows on the front. Aft drop curtain with combination zip & press stud closures.
4. **MAST/BOOM/SAILS:**
 - Mast and boom by Tempo Spars. Mast Tempo Section Anodised clear.
 - Double Spreader, 7/8 rig.
 - Standing Rigging - Forestay 3/8 (10mm) 1 x 19 wire
 - Sidestays 3/8 (10mm) 1 x 19 wire
 - Diamonds 5/16 (8mm) 1 x 19 wire.
 - All fitted with Sealock turnbuckles and end fittings.
 - Hinged mast base to allow for lowering on boat.
 - Halyards - Main halyard: 10 mm Spectra rope : Heavy duty shackle.
 - Genoa halyard: 10 mm Spectra rope. Heavy duty shackle.
 - Topping lift: 8 mm Spectra, Heavy duty shackle.
 - Spinnaker Halyard: 10mm rope with snapshackle spliced to end.
 - Boom outhaul.
 - 2 x mainsail reefing lines fitted.
 - All halyards, reefing lines to be lead back to cockpit through turning blocks, rope clutches (Spinlock).
 - Sheet Winches: 2 x Harken ST40's.
 - Fully battened mainsail. Luff adjustable batten end caps. Fibreglass sail battens.
 - Cruising mainsail cover with integrated lazy jack system.
 - Headsail.
 - Headsail traveller track with end stops.
 - Tempo mainsail batten sliders.
5. **DECK EQUIPMENT:**
 - Hatches (6 in total)
 - 2 x Forward Hatches Aluminium frame 500 x 500 (Gebo)
 - 2 x Mid cabin hatches. (Gebo)
 - 2 x Aft cabin hatches (Gebo).
 - 4 x Mooring cleats.
 - 1 x Anchor cleats.
 - Forward catwalk swim ladder - hinges under hinged catwalk.
 - Ventilation: 2 x Dorade vents (PVC "Seabird").
 - Mast base turning blocks RF 1350.
 - Saddle at base of mast for halyard attachment.
 - 8 x Rope clutches - Spinlock brand..
 - Stanchions/Rails: High quality stanchions, bow rails and stern rails with 3 life-lines. 600mm high to meet Australian survey requirements..
 - 4 x access gates with pelican hook releases.
 - 1 x manual bilge pump. (Survey boats have 3 manual pumps).
6. **CENTRE COCKPIT**
 - Dining table: F/G in centre cockpit. Folds down to create double bed.
 - Upholstered cockpit cushions and backrests.
7. **FORWARD BEAM, CATWALK AND TRAMPOLINES:**

- Forward beam section 125 x 3mm. Painted. Adjustable pelican striker and cable.
 - 1 x Mooring rollers above foredeck.
 - 1 x Anchor roller under deck. Permanent stowage position for 35lb Plough (CQR type) anchor. (cheeks 75mm high).
 - Catwalk in foam-sandwich fibreglass. Supported by aluminium frame 100mm x 50mm.
8. **AFT BEAM AND DECK:**
- Anodised aft beam.
 - Mainsail traveller track, traveller car and 3:1 traveller controls.
 - 8 to 1 Mainsail sheet system - Ronstan blocks.
 - Aft teak slatted seats behind aft beam in stainless steel frame with fibreglass table (+ BBQ if optioned) between seats.
 - Stainless steel Targa bar over Seating.
9. **RUDDER SYSTEM:**
- 2 X 26" stainless steel steering wheels.
 - Cable linked steering. Both wheels linked.
10. **INTERIOR FINISH:**
- Choice of American Oak or Cherry interior.
 - Slides and cabin top lined with fronrunner carpet and vinyl.
 - Common area - soles timber - teak with holly inlay. Finished in high gloss two pack polyurethane (Estapol) finish - four coats..
 - Cabin soles carpet.
 - Cockpit Cushion seats and backrests in Saloon.
11. **GALLEY**
- Maxie 2 burner LPG stainless steel stove with griller. Flame failure device fitted to shut off LPG immediately in event of flame going out.
 - 2 bowl stainless steel double sink.
 - Pressure fresh water system. Whale single tap.
 - Laminex galley tops, cupboards with perspex sliding front.
 - Refrigerator with attached separate freezer. 12volt Eutectic system by ICEER.
 - Good storage/cupboards.
 - Drop-down dinette table finished in matching laminex and decorative timber.
 - Dinette upholstered. Seats 4" foam with backs 2".
12. **SLEEPING CABINS:**
- Solid doors on all private cabins.
 - Mattresses to be 4" foam upholstered.
 - Cabins lined.
 - Storage/Cupboards.
13. **HEAD:**
- Solid lockable door. Oak/Ash/Cedar exterior finish with waterproof laminex interior finish.
 - PAR manual toilet.
 - Sullage tank built in. Pump out by shore station.
 - Pipes, skin fittings and seacocks to be easily accessible and to meet MSB survey requirements.
 - Vanity basin with pressure fresh water.
 - Fresh water shower with flexible hand-held hose. Electric shower bilge pump with direct overboard discharge.
 - Cupboard/shelves to very high quality.
14. **LIGHTING/ELECTRICAL SYSTEM:**
- Custom made electrical switch panel with circuit breakers. Very high quality throughout.
 - Tinned wire used throughout.
 - 3 x heavy duty 120 AH batteries. BESCO 487 (or equivalent).
 - 230amp heavy duty isolation switch.
 - Solar Panels: 2 x 120 watt solar panels. BP brand (or equivalent).
 - All cabins with individual lighting.
 - Galley/saloon area - 2 x fluoro lights.
 - Diffused lights over aft deck - 2 lights.
 - Centre cockpit lighting.

14. PLUMBING / FRESH WATER TANKS:

- Fibreglass freshwater tank. 400 litres total. External filler at mast base.
- "Whale" system colour-coded piping throughout.
- Jabsco fresh water pump with filters.
- Bronze through-hull fittings to Australian survey standard.

15. NAVIGATION EQUIPMENT:

- Twin steering compasses. Olympic brand - 100mm diameter card.
- Log , Speed Depth: Navman Multi.

16. ENGINES:

- Twin Yamaha 9.9hp engines. Mounted under each helm seat at each steering station.
- Remote electric key start. Ignition for both engines is at the starboard steering station.
- Dual engine controls at starboard helm station.

15. ANCHORING / MOORING:

- Primary anchor system consisting of 35lb CQR type Plough anchor with 10 metres x 8mm short link galvanised chain plus 50 metres x 16mm anchor rope.
- Manual Anchor Winch: Muir (or similar) brand manually operated anchor winch mounted on foredeck.
- 3 x PVC Inflatable Fenders
- 4 x Mooring lines (each 15 metres x 14mm).

16. ANTIFOULING / STRIPING:

- Epoxy barrier coat plus 2 coats of Devoe ABC3 black antifouling.
- Decorative striping on hulls.

DISCLAIMER : The Specifications above may change at Seawind Catamaran's discretion.



PH: +61 (0)2 9810 1844 - Fax: +61 (0)2 9810 9040

Email: info@seawindcats.com

Web: www.seawindcats.com

PO Box 5, Rozelle NSW 2039

Sydney - Australia